

LED FLOOD LIGHT SERIES



Technical Specifications

Size:	30W: 5" L x 6.6" W x 1.7" D 50W: 6" L x 8.5" W x 2.2" D
Watts:	30W 50W
Lumen:	3,860lm 7,080lm
CCT:	4000K 5000K 5700K
Voltage:	AC100-240/100-277V (50/60Hz)
Dimmable:	No
Beam Angle:	150°
CRI:	≥70
PF:	>0.9
IP Rate:	IP65
Materials:	Aluminum, PC
Housing Color:	Bronze, Clear
Lifespan:	50,000 hours




Features

LED Flood Lights are commonly used to replace HPS flood lights and metal halides and can provide an energy savings of up to 70%. These flood lights are safe for outdoor use and protected from rain, snow, and weak jets of water, such as sprinklers. LED Flood Lights are perfect for libraries, parks, billboards, and architecture sites.



Isolux Diagrams

FL06-5700-30

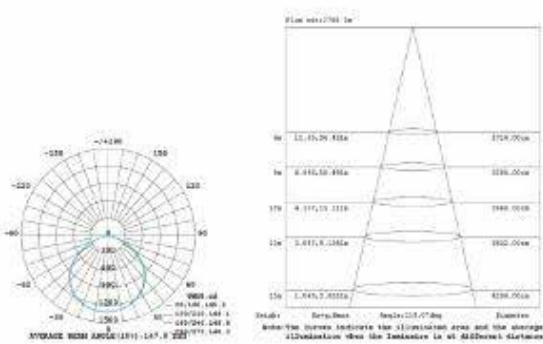

FL06-5700-50

