

LED OUTDOOR LIGHT SERIES

- SES-FL-5700-30
- SES-FL-5700-50
- SES-FL-5700-80
- SES-FL-5700-100
- SES-FL-5700-150



Technical specification

Watts	30W/50W/80W/100W/150W
Luminous Flux	3000lm/4900lm/8600lm/11000lm/16400lm
CCT	5700K
Voltage	AC100-277V 50/60Hz
Beam Angle	120x90°
CRI	>75Ra
PF	0.9
IP Rate	IP65



Application

- 1: Stage, Advertising Board, Gym, Stadium, Yard, Lawn, Garden, Park, Plaza, Shopping Mall, Exhibition Hall, Dock, Highway Toll Station etc.
- 2: Widely used in the lighting and decoration of Hotels, Guest houses, Clubs, Windows, Clothing stores and other places.




DESIGNLIGHTS
CONSORTIUM



RoHS

Dimensional Diagrams(mm) / Distribution Curve of Meridian

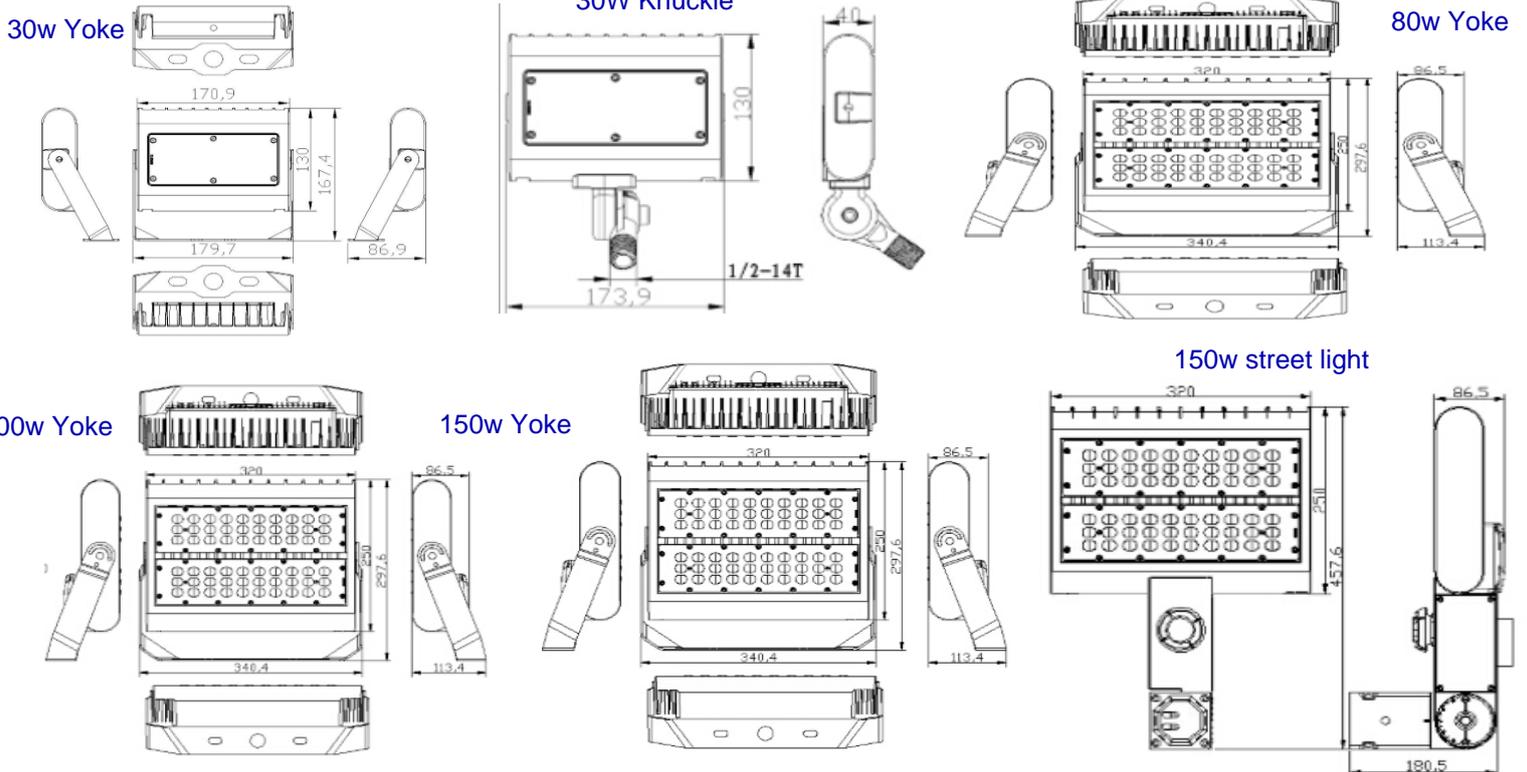

SES-FLT-5700-30

SES-FLT-5700-80

SES-FLT-5700-150

